


2019-S

Designation : 19 mm (0.750 ") Spacing Connecting (male) Plug. 4 mm Banana Plugs.
P / N : 2019-S-color (nickel-coated contact), 2019-S-AuNi-color (gold-coated contact).

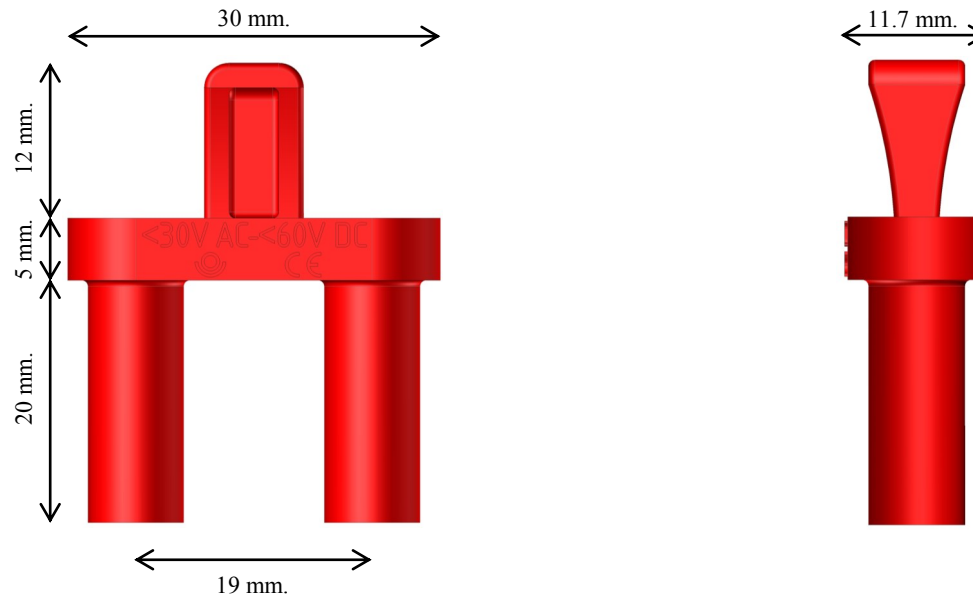

The two 4 mm banana plugs are connected together to short two 19 mm spacing 4 mm banana jacks.

The 4 mm banana male connections comply with the 4 mm banana sockets of most of the worldwide most famous manufacturers.

Electro-PJP's marking.

European Union marking.

Voltage protection markings.

The design and the material of the lantern contact springs meet the need of low resistance and reliability.

2019-S

Designation : 19 mm (0.750 ") Spacing Connecting (male) Plug, 4 mm Banana Plugs.
 P / N : 2019-S-*color* (nickel-coated contact), 2019-S-AuNi-*color* (gold-coated contact).

Electrical protection	33 V AC / 70 V DC. 36 A.
	33 V AC / 70 V DC
Operating temperature range	-20 °C mini., +80 °C maxi..
Conformity	<ul style="list-style-type: none"> • European Directive "RoHS" 2011/65/EU. • European REACH regulation n°1907 / 2006.
Environment	<ul style="list-style-type: none"> • "RoHS" compliant, Pb ≤ 4 % in conductor, Pb ≤ 0.1 % in insulator, Hg ≤ 0.1 %, Cr VI ≤ 0.1 %, Cd ≤ 0.01 %, PBB ≤ 0.1 %, and PBDE ≤ 0.1 %. • REACH compliant, no substances from the candidate list of SVHC for authorisation at mass concentrations greater than 0.1 %.
Materials	Conductors : nickel-coated or gold-coated brass. Insulator : please contact us.
Colors	Black Red
Reliability benchmark	Year of 1st placing on the market 1996.
Packaging	Bag of 10 units (default packaging).

Contact us at :
 sales@electro-pjp.com

+33(0) 384 821 330

ELECTRO-PJP
 ZI "LES CHARMES D'AMONT"
 13 RUE DE MADRID
 39500 TAVAUZ
 FRANCE